

STOFF

Facet Kollektion

Material	75% Wolle, 25% Polyamid
Gewicht	600g/lfm
Breite	145 cm
Scheuerfestigkeit	100'000 (sehr gut)
Pilling	3-4 (normal)
Lichtechtheit	sehr gut




Facet Stofffarben für M HAUS / M SQUARE



BLACK 1003



NATURAL 01

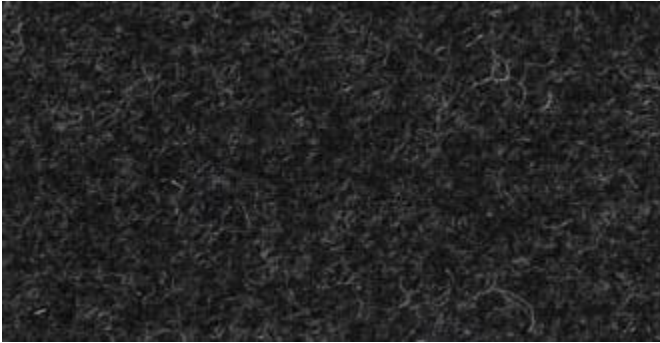

ANTHRACITE 67



BEIGE 1037



MIDDLE GREY 1001



PEBBLE 07



LIGHT GREY 1000



DOLPHIN 180



ASH GREY 40



SHITAKE 124



TAUPE 1008



FIRE 139



RUST 29



RED 2011



DARK BROWN 18



ORANGE 2012/B



PURPLE 78



MANDARIN 129



AUBERGINE 74



TERRA 31



YELLOW 24



MINT 50



MAIZE 22



AZURE 144



PISTACHIO 52



LIGHT BLUE 41



ARMY 14



AQUA 143



OLIVE 53



OCEAN BLUE 147



PETROL 56



NIGHTSHADE 178



BLUE 45



PRUNE 76



NAVY 1007



FUCHSIA 77



INDIGO 90



PINK 73



VIOLET 72



BLOSSOM 166

Facet - Article passport



Woolly fabric with a soft grip. Made from recycled material.

Available from stock in a wide range of contemporary and commercial colours.

Product characteristics

Productgroup	flatweave
Applications	sofa's, beds, chairs with fitted and loose fitting upholstery, drapery
Composition faceside	75%WO 25%PA
Statistic Code	51113080
Dyeing method	yarn dyed
Available colours	40

Durability specifications

Test	Test Specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2016-01		Norm DIN EN 14 465:2006-09
				DRY	WET	DGM	DGM+	
Abrasion Resistance - yarn breakage	DIN EN ISO 12947-1:2007-04, DIN EN ISO 12947-2:2017-03	CTL	cycles	>100.000		min. 12.000	min. 16.000	A
Pilling	DIN EN ISO 12945-2:2000-11, 2000 cycles	CTL	grade	3-4		min. 3-4	min. 4	C
Colour fastness to light	DIN EN ISO 105-B02:2014-11, Process 3, exposure level 5							
	light colours	CTL	grade	5		min. 4	min. 5	B
	middle colours	CTL	grade	5		min. 4	min. 5	B
Colour fastness to rubbing	DIN EN ISO 105-X12:2016-11							
	light colours	CTL	grade	5	5	dry: 4, wet: 3	dry: min 4, wet: 3-4	A/A
	middle colours	CTL	grade	5	4-5	dry: 4, wet: 3	dry: min 4, wet: 3-4	A/A
Ignitability (cigarette test)	BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) Regulations: 1988 No. 1324, Schedule 4 part I, Ignition source 0: cigarette							
		Centexbel		passed				
	DIN EN ISO 1021-1:2014, Source: Smouldering cigarette							
Ignitability (match test)	BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) Regulations: 1988 No. 1324, Schedule 4 part I, Ignition source 1: Match flame equivalent							
		Centexbel		passed				
	DIN EN ISO 1021-2:2014, Source: Match flame equivalent							

Processing specifications

Minimum workable width in centimeters	± 145
Roll length in meters	± 50
Material weight in grams per linear meter	± 600

Test	Test Specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2016-01		Norm DIN EN 14 465:2006-09
				WARP	WEFT	DGM	DGM+	
Tensile strength	DIN EN ISO 13934-1:2013-08	CTL	Newton	455	348	min. 350	min. 400	A/A
Tear growth resistance	DIN EN ISO 13937-3:2000-06	CTL	Newton	40,5	35,2	min. 25	min. 30	A/A
Resistance to seam slippage	DIN EN ISO 13936-2:2004-07, Load 180 N	CTL	mm	2,7	2,7	max. 5	max. 4	A/A
Chemical substances	REACH	Centexbel		passed				

Cleaning specifications

    	   
---	---



Hinweis:

Die Darstellung der Farben am Bildschirm wie auch auf Papiausdrucken ist nicht farbverbindlich und kann von den Originalfarben abweichen.

IDENTI

Identi AG
Büromöbelsysteme

Entwicklung,
Produktion, Vertrieb

Bionstrasse 5
CH-9015 St. Gallen
T 071 311 27 27

www.identi.ch
info@identi.ch